


# BAR TYPE - SPLITTER TROUGH - ALUMINUM - CSA 1 (400-600amp)

The Bar type splitter troughs are used for indoor electrical power distribution, permitting main circuit conductors to be split into multiple branch circuit conductors.

- 10 Ga or 12 Ga aluminum
- 3 & 4 wire both preinstalled
- Screw cover
- CSA Certified

### Options include:

- additional copper or aluminum lugs
- powder coating
- copper bar
- hinged cover
- weatherproof

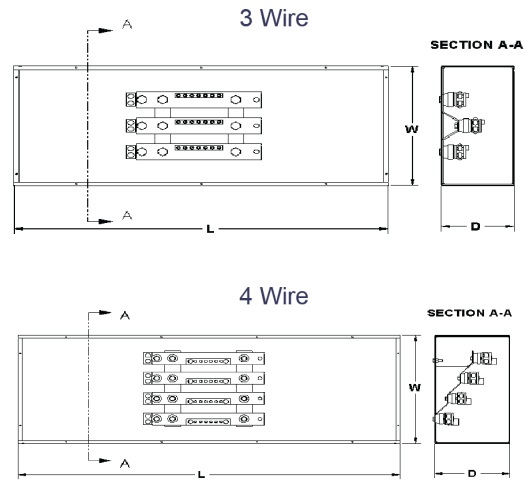

SPLITTERS, BUSGUTTERS & LUGS

CAT No:		Main Lugs			Branch Lugs		Splitter box			
3 Wire	4 Wire	Amp	Qty.	Wires	Qty.	Wires	L	W	D	LBS
BAR-A-400-24-3	BAR-A-400-24-4*	400	2	250 MCM	7	14-2/0	24	15	7	21.0
BAR-A-400-36-3	BAR-A-400-36-4*	400	2	250 MCM	7	14-2/0	36	15	7	21.0
BAR-A-400-48-3	BAR-A-400-48-4*	400	2	250 MCM	7	14-2/0	48	15	7	28.0
BAR-A-400-60-3	BAR-A-400-60-4*	400	2	250 MCM	7	14-2/0	60	15	7	31.0
BAR-A-400-72-3	BAR-A-400-72-4*	400	2	250 MCM	7	14-2/0	72	15	7	35.0
BAR-A-600-36-3	BAR-A-600-36-4*	600	2	350 MCM	2	6-300 MCM	36	15	7	25.0
BAR-A-600-48-3	BAR-A-600-48-4*	600	2	350 MCM	and		48	15	7	29.0
BAR-A-600-60-3	BAR-A-600-60-4	600	2	350 MCM			60	15	7	32.0
BAR-A-600-72-3	BAR-A-600-72-4	600	2	350 MCM	6	14-2/0	72	15	7	39.0
*Box size W x D = 18 x 9.5					For 4 wire system add 4 lbs					

Custom sizes available